



Model NR501 Series Residential Tankless Water Heater Specification Sheet

- **Standard Input-** Gas consumption ranges from 15,000 BTU/h to 120,000 BTU/h
- **Capacity Range-** Flow rates from 0.5 GPM up to 5.0 GPM
- **Compact Design-** ANSI Z21.10.3/CSA 4.3 certified design that can be wall-mounted outdoors.
- **Durable Steel Casing with Polyester Coating**
- **No Venting Required** - Outdoor (-OD) model does not require any additional vent pieces
- **Uniform Energy Factor (UEF)** - 0.82
- **Thermal Efficiency** - 84% efficient for use with natural gas or propane
- **Temperature Controls** - Includes 120°F (default), 130°F, 135°F, or 140°F standard temperature settings*
- **Safety Devices-** Flame Sensor, Overheat Prevention Device, Lighting Protection Device, Freeze Protection, Fan Rotation Detector
- **Additional Features** - Temperature Lockout, High Elevation Adjustment, Built-in display window
- **12-Year** Limited Heat Exchanger Warranty for Standard Residential Use**
- **5-Year Limited Parts Warranty**
- **1-Year Reasonable Labor Warranty**
- **Approvals-** CSA (US Only), UPC***, NSF, Low NOx - Complies with SCAQMD Rule 1146.2 (14 ng/J or 20ppm) low NOx regulations.



OD Model

Model

NR501 - OD

Accessories

- ☐ Isolation Valves (IK-WV-200-3-(SW/TH)-LF)
- ☐ Outdoor Recess Box (#RB-510)
- ☐ Remote Controller (#RC-7651M)
- ☐ Remote Controller Cord (#RC-CORD10)
- ☐ Remote Controller Cord (#RC-CORD26)
- ☐ Pipe Cover (#PC-1S)




*Optional remote thermostat can adjust temperature from 115°F - 160°F in 5°F intervals

**12 Years replacement on the heat exchanger when the product is used in a single family dwelling. 3 Years replacement on heat exchanger when the product is used for commercial capacity, if it is used in other than a single family dwelling, or if the product is supplied with pre-heated or circulated water (an aquastat being the minimum pump control requirement). Refer to the Noritz Limited Warranty for complete coverage details.

*** This product complies with California AB 1953 Low Lead Law and Section 1417(d) of the Safe Drinking Water Act.


Dimensions

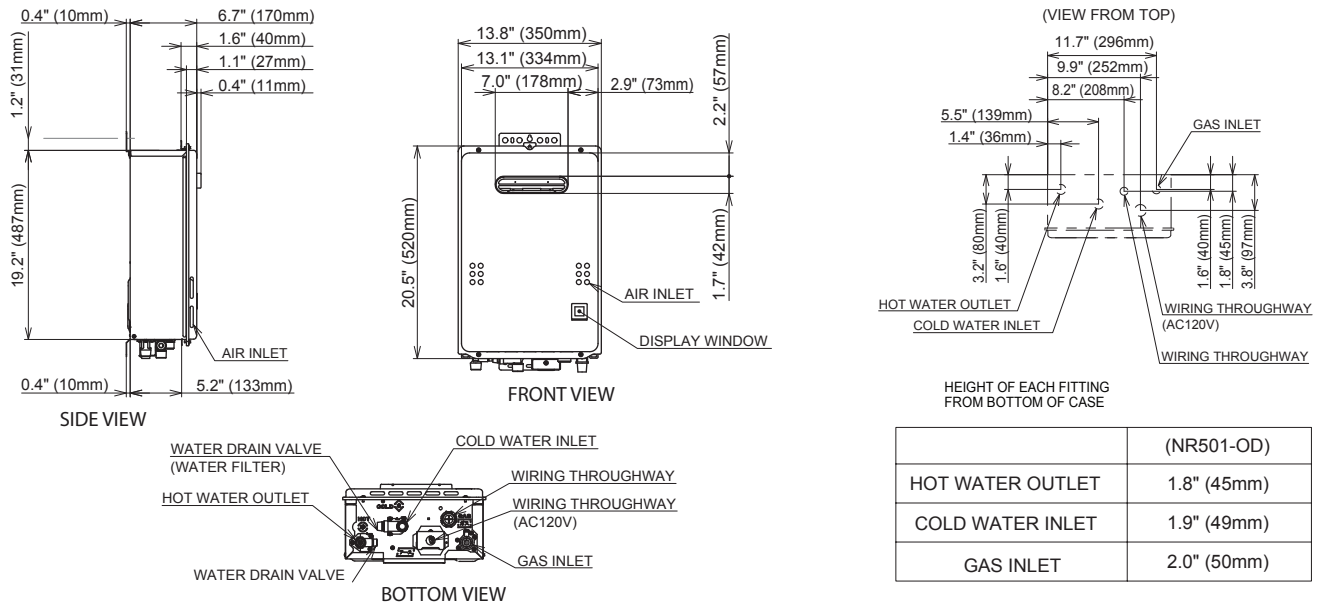

Flow Rates

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100
Flow Rate (GPM)	5.0	5.0	4.2	3.9	3.3	2.8	2.5	2.2	2.0

Pressure Loss Characteristics

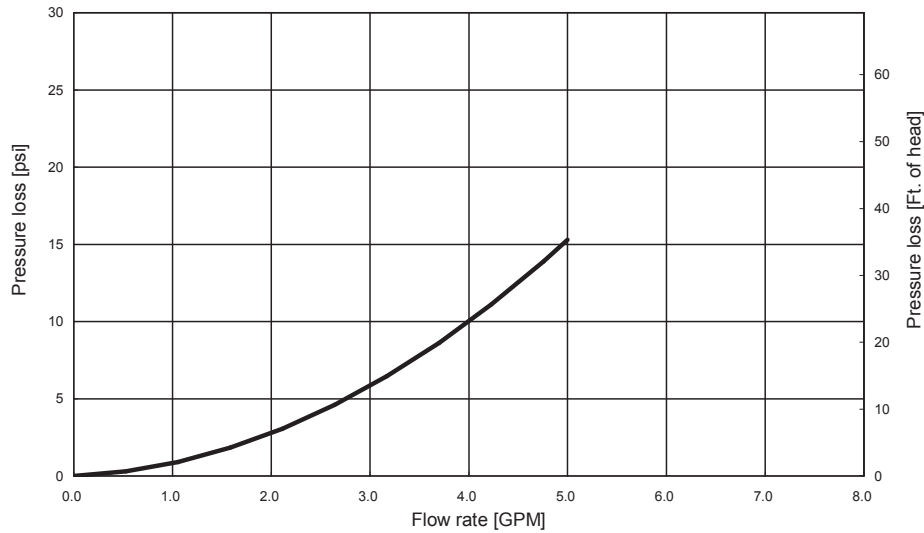

Specifications

Model Name		NR501-OD
Weight		32 (pounds)
Water Holding Capacity		0.15 Gallon (0.5 L)
Connection Sizes	Water Inlet	3/4"
	Hot Water Outlet	3/4"
	Gas Inlet	1/2"
Power	Supply	120VAC (60Hz), less than 4 amperes
	Consumption	NG: 35W LP: 38W Freeze Prevention 138W
Freeze Protection		Outdoor: -4°F
Temperature Settings with Optional Remote Controller	°F Mode	115-140°F (In 5°F intervals) (6 Options)
	°C Mode	46-48°C (In 1°C intervals), 50, 55, 60°C (In 5°C intervals) (6 Options)
Default Temperature Options	°F Mode	120, 130, 135, 140°F (Default is 120°F)
	°C Mode	50, 54, 57, 60°C (Default is 50°C)