NORITZ

Tankless Water Heater Accessories
Specification Sheet
System Controller

• Available System Controller models can provide a central communication link for up to 6-unit, 12-unit, or 24-unit Multi-Systems

• Provides fully modulating operation among all units (user selectable option to fire 1 or 2 units default by default)

• Rotates the operation of the units within the Multi-System for even wear

• Only one Remote Controller is required to control and monitor all the units connected to the System Controller

• Pump control allows for a pump(s) to be connected and controlled with built-in timer and aquastat features

• Auxillary back up allows for continued system operation during partial failure conditions.

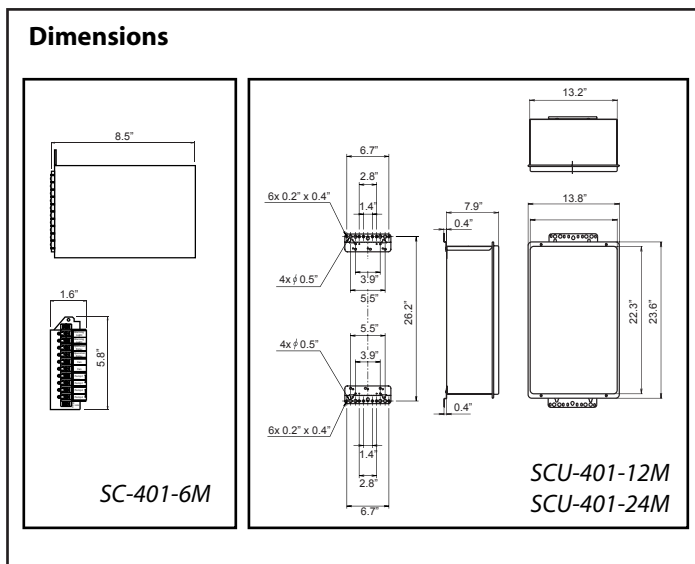

SC-401-6M

SCU-401-12M
SCU-401-24M

System Controller

☐ 6-Unit System Controller (#SC-401-6M)

☐ 12-Unit System Controller (#SCU-401-12M)

☐ 24-Unit System Controller (#SCU-401-24M)

Compatible with Commercial Models

NCC199DV (GQ-C3257WZ-FF US)
NCC199OD (GQ-C3257WZ US)
NCC199CDV (GQ-C3259WZ-FF US)
NCC199CDV (GQ-C3260WZ-FF US)
NCC300DV (GQ-C5032WZ-FF US)
NCC300OD (GQ-C5032WZ US)
NC380SV-ASME

Compatible Remote Controller

RC-9018M
RC-7649M (NC380SV-ASME Only)

Example Installation

Unit 3   Unit 2   Unit 1

SC-401-6M

SCU-401-12M
SCU-401-24M

Dimensions

SC-401-6M

SCU-401-12M
SCU-401-24M

Rev. 5/2021