




Tankless Water Heater Accessories Specification Sheet ScaleShield

- Provides superior limescale prevention and corrosion control within the water heater and plumbing system
- Contains water conditioning cartridge that creates scale-inhibiting solution for use with all tankless water heater models
- Comes included with 1 ScaleShield cartridge, housing, transparent o-ring, and housing wrench tool is also included for servicing the accessory



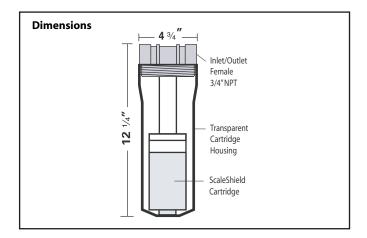

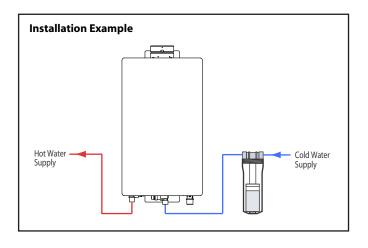



Compatible with All Models		
NR50 Series	NCC199 Series	
NR66 Series	NRC111 Series	
NR71 Series	NR111 Series	
NR83 Series	NC250 Series	
NR98 Series	NC380 Series	
NC199 Series		

Specifications

Models	SS-HB-1	SS-HB-2	
Max. Pressure	150psi	150psi	
Max. Temperature	125 F	125 F	
Connection Size	3/4" Female NPT	3/4" Female NPT	
Accessories	3 Way Bypass Valve	3 Way Bypass Valve	
Cartridge	HBC-1	HBC-2	

Selection Guide

Unit	Model	Description	
NR50 Series	SS-HB-1	Installation on cold-water line feeding tankless heater only	
531/NR66 Series			
631/NR71 Series			
NR83 Series			
751/NR98/NRC98/NC199 Series			
841/NCC199 Series	SS-HB-2	Installation on cold-water line feeding tankless heater only	
842/NRC111 Series			
931/NR111/NC250 Series			
N-1321M-ASME		2 units required for installation on cold-water line feeding	
NC380-SV-ASME		tankless heater only.	
Whole House	Contact Noritz		
Commercial		Contact Noniz	

* Refer to the above selection guide to ensure the correct application of ScaleShield unit(s) ** The overall level of protection will depend on the quality and chemistry of the cold supply water. Replace the

cartridge when it is dissolved near the bottom of the housing.