





NEW PRODUCT ANNOUNCEMENT

NEW! NRC711-DV NRC711-OD

- BTU Input Range 15,000 – 157,000
- Flow Rate 0.5 - 7.1 gpm
- **New scale detection software**
- 3/4" Gas Line Connection
- Vents in 3" PVC (DV Model Only)
- New Display Window
- Tech Data Sheet Included



BTU Input Range 15,000 – 157,000
 Max Flow Rate: 7.1 gpm
 Dimensions: 23.6" x 13.8" x 6.7" (DV model)
 20.5" x 13.8" x 6.7" (OD model)
 Exhaust Type: DV (Convertible to -SV) or OD
 Warranty: 12 years Heat Exchanger
 5 years Parts
 1 year Pre-Approved Reasonable Labor

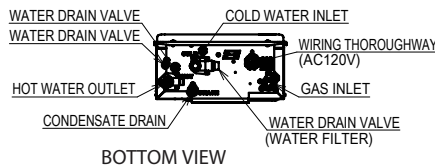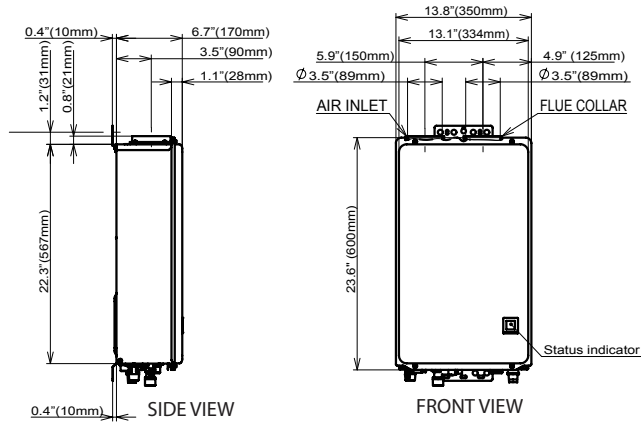

HEIGHT OF EACH FITTING FROM BOTTOM OF CASE

	NRC711-DV	NRC711-OD
CONDENSATE DRAIN	0.8"(20mm)	0.8"(20mm)
HOT WATER OUTLET	1.8"(45mm)	1.8"(45mm)
COLD WATER INLET	2.3"(58mm)	2.3"(58mm)
GAS INLET	2.0"(50mm)	2.0"(50mm)

**Available:
Jan 1st, 2014**

ACCESSORIES:

- Isolator Valves (#IK-WV-200-1-xx-LF)
- Pipe Cover (#PC-1S)
- 3" PVC Termination (#VK3-H-PVC)
- SV Conversion Kit (#SV-CK-3)
- Recess Box (#RB-510)