
N NORITZ[®]

NC1991-DVC

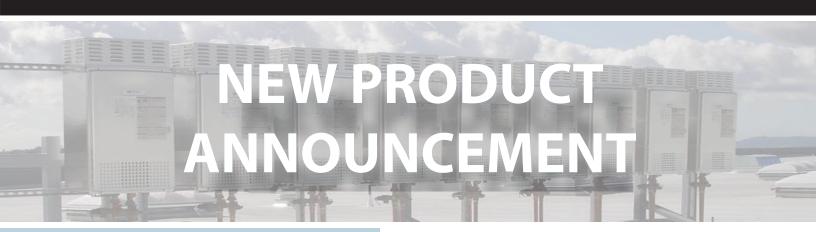

NEW! Noritz NC1991-DVC Commercial Models for Indoor Installations

- BTU input range from 16,000 up to 199,900 BTUh
- Maximum flow rate capacity of up to 9.8 GPM
- Part of Noritz America's line of ProTough products for indoor (-DVC) installations
- Heat exchanger manufactured with commercial grade copper, 25% thicker piping than standard models
- Zero Clearance Noritz concentric venting is rated for zero clearance while requiring only one wall penetration
- Ultra Low Nox Burner, below 20 ppm or 14 ng/joule; SCAQMD Compliant


Product: NC1991-DVC Commercial Water Heater **Model#:** NC1991-DVC

Availability: April 16, 2012

Tankless for Professionals[™]

SI NORITZ

Specifications:

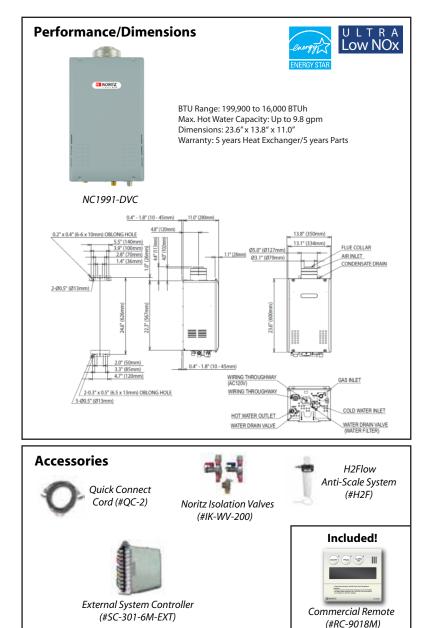

Noritz America[™] Corporation 11160 Grace Ave., Fountain Valley, California 92708 Phone: (714) 433-2905 Fax: (714) 241-1514 www.noritz.com 2012 April ©2012 Noritz America[™] Corporation. All rights reserved. Prices are subject to change without notice.