

NEW PRODUCT ANNOUNCEMENT

NEW! Noritz NC1991-OD Commercial Models for Outdoor Installations

- BTU input range from 16,000 up to 199,900 BTUH
- Maximum flow rate capacity of up to 9.8 GPM
- Part of Noritz America's line of ProTough products for outdoor (-OD) installations
- Heat exchanger manufactured with commercial grade copper, 25% thicker piping than standard models
- Features an outdoor vent design that does not require additional venting

Product: NC1991-OD Commercial Water Heater
Model#: NC1991-OD

Availability: February 23, 2012



Tankless for Professionals™


Specifications:

Performance/Dimensions



NC1991-OD

BTU Range: 199,900 to 16,000 BTUH
 Max. Hot Water Capacity: Up to 9.8 gpm
 Dimensions: 23.6" x 13.8" x 9.4"
 Warranty: 5 years Heat Exchanger/5 years Parts

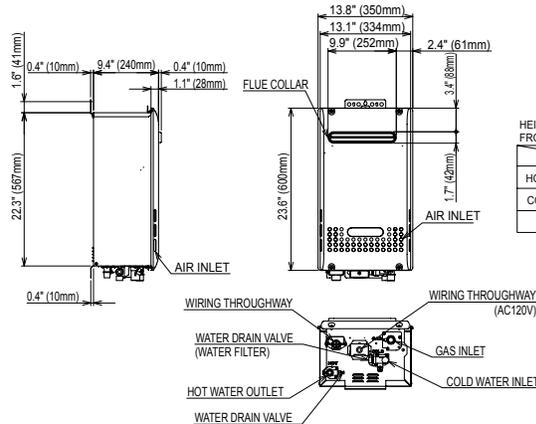

HEIGHT OF EACH FITTINGS FROM BOTTOM OF CASE

	NC1991-OD
HOT WATER OUTLET	1.8" (45mm)
COLD WATER INLET	2.2" (55mm)
GAS INLET	2.2" (56mm)

Accessories



Quick Connect Cord (#QC-2)



Noritz Isolation Valves (#IK-WV-200)



Recess Box for OD Model (#RB-700-1)
Available April 2012



External System Controller
COMING SOON!



H2Flow Anti-Scale System (#H2F)