



CONDENSING TANKLESS GAS WATER HEATER

Owner's Guide

Model : NRC663-FSV (EZTR40)

FOR USE IN RESIDENTIAL APPLICATIONS.

WARNING If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury, or death.

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

-WHAT TO DO IF YOU SMELL GAS

- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in your building.
- Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency or the gas supplier.





Energy

I OW-I FAD

Low NOx Approved by SCAQMD 14 ng/J or 20 ppm (Natural Gas Only)



Thank you for purchasing this Noritz Tankless Gas Water Heater. Before using, please:

Read this manual completely for operation instructions.

See the warranty registration card (included separately), and then visit the Noritz website (www.noritz.com/warranty) to register your product.

Keep this manual (and the warranty registration card) where it can be found whenever necessary.

Installation must conform with local codes, or in the absence of local codes, the National Fuel Gas Code, ANSI Z223.1/NFPA 54.

Noritz America reserves the right to discontinue, or change at any time, the designs and/or specifications of its products without notice.

NORITZ America Corporation



SBB809K-2 Rev. 01/17


Important Safety Information-1

To prevent damage to property and injury to the user, the icons shown below will be used to warn of varving levels of danger.

Every indication is critical to the safe operation of the water heater and must be understood and observed. Potential dangers from accidents during installation and use are divided into the following four categories. Closely observe these warnings; they are critical to your safety.

Icons warning of risk level

This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

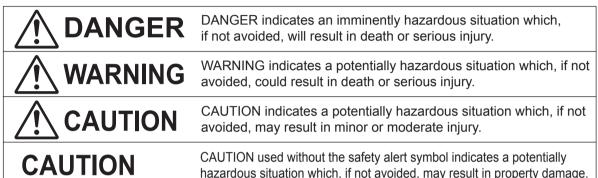

Other icons





Vapors from flammable liquids will explode and catch fire causing death or severe burns.

Do not use or store flammable products such as gasoline, solvents or adhesives in the same room or area near the water heater.

Keep flammable products: Vapors:

- 1. Far away from the water
 - 1. Cannot be seen.
 - heater.
- 2. Vapors are heavier than air.
- 2. In approved containers.
- 3. Go a long way on the floor.
- 4. Can be carried from other rooms
- 3. Tightly closed. 4. Out of children's reach.
- to the main burner by air currents.



Hot Water Heater temperatures over 125°F (52°C) can cause severe burns instantly or death from scalding.

Children, disabled and elderly are at the highest risk of being scalded. Feel water temperature before bathing or showering. Temperature limiting valves are available, ask professional person.




Flammable Vapo





Do not use the water heater if the exhaust pipe clot is displaced, has holes, is clogged or is corroded.





Do not allow anyone to change the water temperature while hot water is being used.

To prevent scalding, do not change the water temperature to a higher setting.



A. This water heater does not have a pilot. It is equipped with an ignition device that automatically lights the burner. Do not try to light the burner by hand.

B. BEFORE OPERATING smell all around the water heater area for evidence of leaking gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.

WHAT TO DO IF YOU SMELL GAS.

- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in your building.
- Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the fire department.
- C. Use only your hand to turn the gas valve knob. Never use tools. If the knob will not turn by hand, don't try to repair it. Call a qualified service technician. Force or attempted repair may result in a fire or explosion.
- D. Do not use this water heater if any part has been under water. Immediately call a qualified service technician to inspect the water heater and to replace any damaged parts.



Check whether or not the air inlet filter is clogged with dust, trash or the like.



Clogging the opening may result in incomplete combustion. Air inlet filter



After the water heater has been out of use for a long time make sure that you fill the condensate trap with water.

This is to prevent dangerous exhaust gases from entering the building. Failure to fill the condensate trap could result in severe personal injury or death.

(Refer to page 20 for further instructions.)

have Wh

- When a gas leak is noticed:
- 1. Stop use immediately
- 2. Close the gas valve
- Be sure to do. 3. Open windows and doors



If you detect abnormal combustion or abnormal odors, or during an earthquake, tornado or fire:

- 1. Turn off the hot water supply
- 2. Turn off the power to the water heater
- 3. Turn off gas and water supply valve
- 4. Call the nearest Noritz agent

Explosion Hazard ;

If the temperature and pressure relief valve is dripping or leaking, have a qualified service technician replace it. Do not plug or remove the valve.

Failure to follow these instructions can result in fire or explosion, and personal injury or death.



Check the temperature of the running hot water before entering the shower.

Check the temperature

before stepping into

the bath tub.

3

Important Safety Information-2

(Continued)



Do not place the exhaust vent terminal in an indoor environment by means of adding walls and ceiling (Do not enclose using corrugated sheets, etc.)

Carbon monoxide poisoning or fire may occur as a result.



Do not place outdoors


Rain may enter the unit or the burner fire may be blown by the wind, causing malfunction or fire as a result.



Outdoor



Leave the proper clearance between the water heater and nearby objects (trees, timber, boxes with flammable materials etc.).



* Indicates suggested clearances for maintenance.
** In order to check a rating plate.



Do not place combustibles such as laundry, newspapers, oils etc. near the heater or the exhaust vent terminal.



Carbon Monoxide Poisoning Hazard. Do not install this water heater in a mobile home, recreational vehicle or on a boat.



Do not use combustible chemicals such as oil, gasoline, benzene etc. in the near the heater or the exhaust vent terminal.



Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.



Do not place or use a spray can near the water heater or the exhaust vent terminal.



Confirm that the gas and power supply indicated on the rating plate.

Ex. For Natural Gas





Installation and service must be performed by a qualified installer, service agency or the gas supplier.



If this unit will be installed in a location where hair spray or aerosols will be used, locate the unit in a separate area that is supplied with fresh air from outdoors.



Do not use hair spray or spray detergent in the vicinity of the heater.



Check the air supply opening for dust or obstructions.





Do not allow small children to play unsupervised in the bathroom. Do not allow small children to bath unsupervised.



Do not touch the power cord with wet hands.

Don't touch Electric with a wet Shock.



Consult the nearest Noritz agent if the water heater location needs to be changed. (Continued)



Contact a qualified service technician for any necessary repairs, service or maintenance.



Contact Noritz before using with a solar pre-heater.

California Proposition 65 lists chemical substances known to the state to cause cancer, birth defects, death, serious illness or other reproductive harm. This product may contain such substances, be their origin from fuel combustion (gas, oil) or components of the product itself. The gas conversion kit shall be installed by a qualified service agency in accordance with the manufacturer's instructions and all applicable codes and requirements of the authority having jurisdiction. The information in the instructions must be followed to minimize the risk of fire or explosion or to prevent property damage, personal injury, or death. The qualified service agency is responsible for the proper installation of this kit. The installation is not proper and complete until the operation of the converted appliance is checked as specified in the manufacturer's instructions supplied with the kit.



Be sure to electrically ground the unit.



Keep power cord free of dust.



Do not use the water heater for other than hot water supply, shower and bath.



Do not use a broken or modified power cord. Do not bind, bend or stretch power cords. Do not scratch, modify, or subject them to impact or force.



To prevent burns or scalding, turn off the power button and wait until the unit cools before performing maintenance.



Do not turn off the water heater while someone is bathing.



Do not cover the water heater and the exhaust vent terminal, store trash or debris near it, or in any way block the flow of fresh air to the unit.



Do not install in locations where excessive dust or debris will be in the air.



Do not touch the exhaust vent pipe and exhaust vent terminal during or immediately after operation of the water heater.





Do not use condensate, discharged from the drain pipe, for drinking or for consumption by animals.



If the unit is installed in a location with very high humidity, condensate may form inside the unit and/or cause incomplete combustion, damage to the electrical components, or electric leakage.

Important Safety Information-3

CAUTION

Do not drink water that has been inside the unit for an extended period of time. Do not drink the first use of hot water from the unit in the morning.

Clean the filter on the water inlet as frequently as required by the quality of your local water.

Keep the area around the unit clean.

If boxes, weeds, cobwebs, cockroaches etc. are in the vicinity of the unit, damage or fire can result.

Do not install the unit where the exhaust will blow on walls or windows.

If the water supply is in excess of 12 grains per gallon (200 mg/L) of hardness, acidic or otherwise impure, treat the water with approved methods in order to ensure full warranty coverage. (Page 23)

Problems resulting from scale formation are not covered by the warranty.

Check ignition during use and extinction after use.

Do not run water through the unit when unit is not on.

When discharging hot water, make sure the unit is ON. If water is run through the unit with the unit OFF, water may condense inside the unit and cause incomplete combustion or damage to the internal electrical components.

For single-handle fixtures, you'd turn the handle to the left.

This unit is only approved for installation up to 3,500 ft. (1,050m) above sea level.

Do not disassemble the remote controller.

Do not use benzene, oil or fat detergents to clean the remote controller.

This may cause deformation.

Do not get the remote controller wet.

Although it is water resistant, too much water can cause damage.

Do not splash water on the remote controller. Do not expose the remote controller to steam.

Do not locate the remote controller near stoves or ovens, this may cause damage or failure.

Preventing damage from freezing (Page 18)

Damage can occur from frozen water within the device and pipes even in warm environments. Be sure to read below for appropriate measures. Repairs for damage caused by freezing are not covered by the warranty.

Take necessary measures to prevent freezing of water and leakage of gas when leaving the unit unused for long periods of time. (Page 19)

If it is snowing, check the exhaust vent terminal for blockage.

Do not use parts other than those specified for this unit.

For preventing unexpected carbon monoxide poisoning, it is recommended to attach a CO Sensor (commercially-available product). (The water heater does not stop automatically.)


Contents

Important Safety Information 2
Contents7
Unit Components
Display Window9
Initial Operation10
How to Use (Not using the remote controller)
Using the Water Heater 11
How to Use (Using the optional remote controller)
Remote Controller12
Setting and Using the Water Heater 13
Muting the Remote Controller15
Adjusting the Maximum Output Temperature15
Flow Meter Alarm 16
Preventing Damage from Freezing18
Regular Maintenance
Troubleshooting
Follow-up Service
Specifications

Unit Components

Unit

Indoor Wall Mounted, Power Vented Model

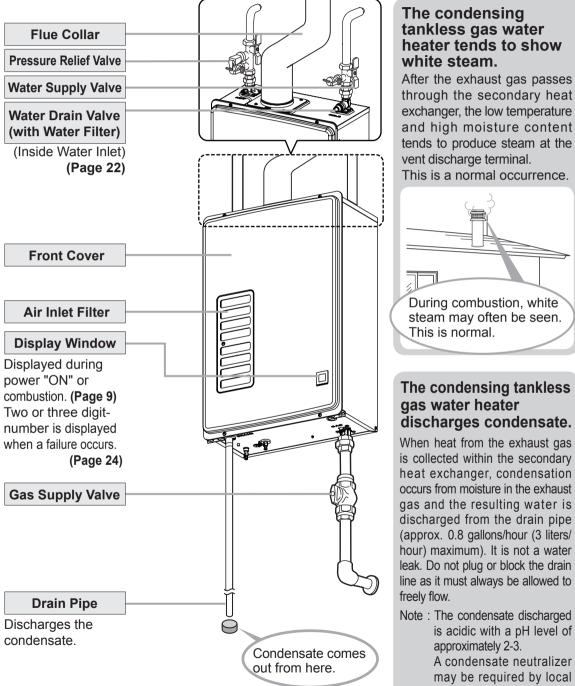


The above illustration shows an example of installation. The exact installation configuration may be slightly different.



code prior to disposal.

Display Window



The display window allows you to view the status of unit or error codes.

When the gas burner is on.



Ōn

When the gas burner is on, set temperature's is displayed for one minute.

When unit is initially plugged into power, set temperature's is displayed for approx. three minutes.



When hot water flows.

(When the gas burner is off, and cold water flows.)

After one minute passed from turn on hot water, the outside edge of the three digit display will rotate in a circular pattern.



If there is a problem with the unit, a numerical error code will flash. (page 24)


(Ex.: error cord 11)

When other indication will appear, please refer to troubleshooting. (page 24)


Initial Operation

Before the first use of your water heater, do the following:


Please check the following when you use the water heater for the first time after the installation. Usually, the hot water is supplied by opening the hot water if gas, water, and electric power are supplied (if there is a remote controller, it should be turned ON).

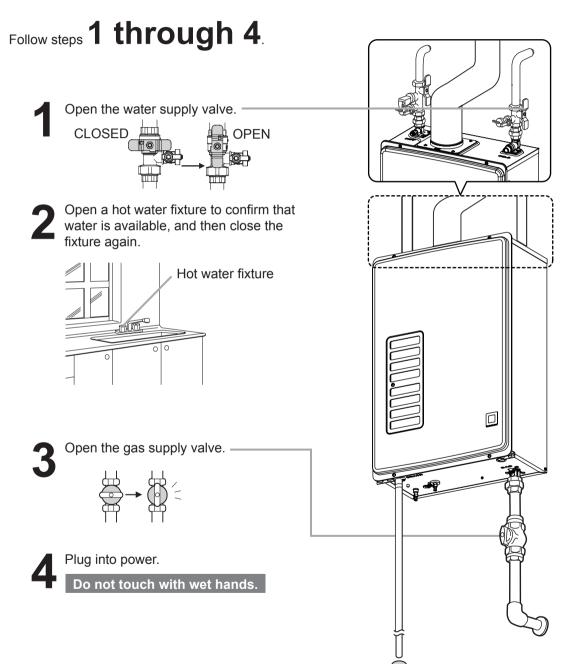

How to Use (Not using the remote controller) Using the Water Heater

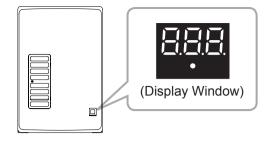

The factory temperature setting is 120°F. Mix with cold water with a mixing valve or at the fixture for desired temperature.





- Set temperature is displayed. * When unit is initially plugged into power.
- * How to check the set temperature. If the power supply is set to "OFF", (Display Window) and then set to "ON", the temperature of supplied hot water is displayed.








Indicates the burner is on

Indicates the burner is on. The outside edge of the 3 digit display will rotate in a circular pattern.

Mix for desired temperature.

Turn off the hot water.








Indicates the burner is off.

The electrical power does not need to be disconnected between uses.

If you want to the temperature to be changed to 130°F, 135°F or 140°F, contact the installer or Noritz.

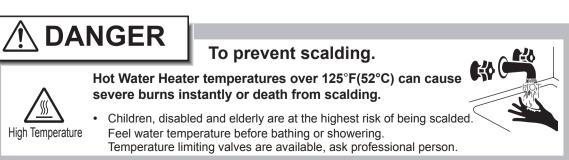


How to Use (Using the optional remote controller)

Remote Controller



If you want to change the temperature of supplied hot water frequently or you want to set the amount of hot water to accumulate the hot water, this remote controller is useful. What is actually displayed depends on how the water heater is set.

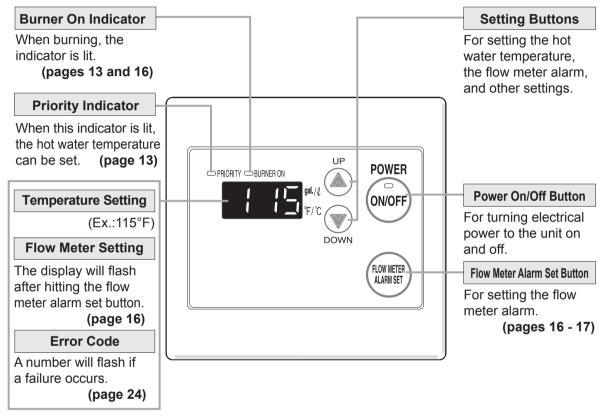

* Before use, remove the protective sheet from the remote controller surface.

Note: Initial factory setting is set to display in °F and gallons. To adjust the display to °C and liters, refer to the Installation Manual.

How to Use (Using the optional remote controller)

Setting and Using the Water Heater

Press the Power On/ On On Off Button ON/OFF PRIORITY BURNER ON gal./ℓ °F/°C The temperature will be displayed on the remote Previous set temperature control thermostat. (Ex.: 115°F) UP Set temperature. Check the indicator lights. (Always check the temperature Hot PRIORITY BURNER ON setting before use.) gal. / 0. Cold DOWN Water temperature When using °F mode: °**⊢**: The temperature settings below are examples. The temperature setting necessary depends on the usage, the length of piping and the time of year. The maximum output temperature can be set using the remote controller. (page 15) 115 120 125 130 135 140 Shower, hot water supply, etc. High temperature *Initial factory setting is 115°F The maximum output temperature When using °C mode: can be set using the remote °C (°F): The temperature settings below are examples. The temperature setting necessary depends on the usage, the length of piping and the time of year. controller. (page 15) 48 46 47 50 55 60 (115)(117` (118) (122) (131) (140)Shower, hot water supply, etc. High temperature *Initial factory setting is 46°C (115°F) If fixtures incorporate mixing valves, set the temperature higher than usual.

* For most residential applications, the recommended setting temperature is 120°F (50°C in °C mode) or less.
 * Consult local codes for minimum operating temperatures.



Turn off the hot water.







Hot Water Heater temperatures over 125°F (52°C) can cause severe burns instantly or death from scalding.

- Children, disabled and elderly are at the highest risk of being scalded.
 Feel water temperature before bathing or showering.
 Temperature limiting valves are available, ask professional person.
- When setting the unit to 125°F / 55°C (131°F) or higher, the temperature display will flash for 10 seconds and emit a tone as a high temperature warning.
- Take caution when using the unit again after setting to 125°F (52°C) or higher. Always check the set temperature before use.
- Do not allow anyone to change the water temperature while hot water is running.




CPRIORITY COURSER ON



Flashes for 10 sec


How to Use (Using the optional remote controller) Muting the Remote Controller

The remote controller will emit a sound when any button is pushed. This sound can be muted if it is desired. * Initial factory setting is with sound

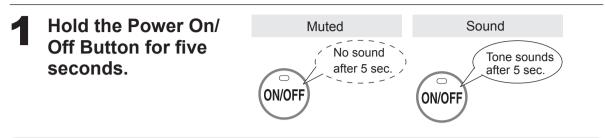

- The flow meter alarm cannot be muted.
- The high temperature warning tone when setting the unit to 125°F / 55°C (131°F) or higher will not emit a sound when muted.


How to Use (Using the optional remote controller) Adjusting the Maximum Output Temperature

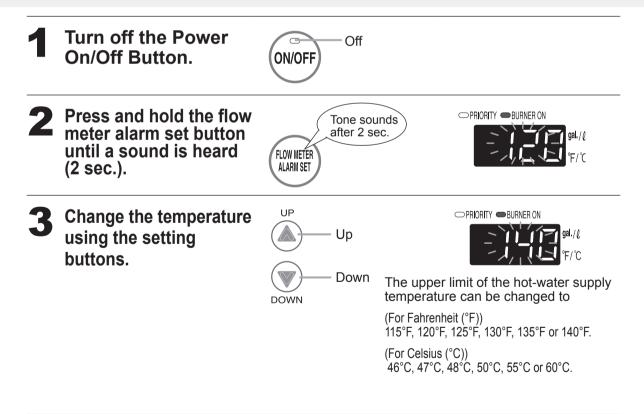

Set the Power button to ON when continuing to use the unit as is. Otherwise, let the unit sit for 30 sec.

How to Use (Using the optional remote controller)

Flow Meter Alarm

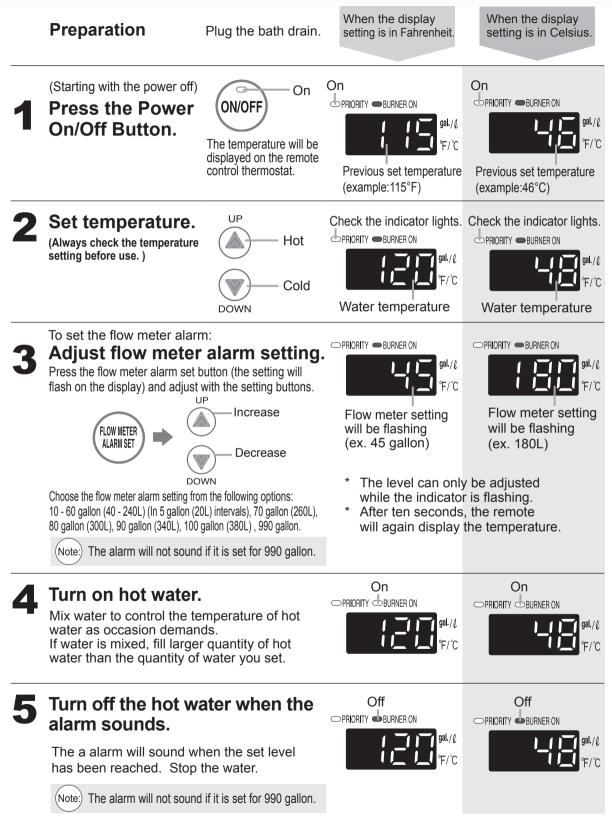

An alarm will sound for ten seconds when the flow reaches the set level.



The water will continue to run unless it is manually turned off.



Check the temperature before stepping into the bath tub.

If the flow meter alarm is being used to indicate when a tub is full:

- If any hot water is being used besides what is going into the tub, the alarm will sound before the tub is full.
- If there was water in the tub before the fill began, or if the water is not shut off manually when the alarm sounds, the tub may overflow.

Preventing Damage from Freezing-1

CAUTION

- * Damage can occur from frozen water within the device and pipes even in warm environments. Be sure to read below for appropriate measures.
- * Repairs for damage caused by freezing are not covered by the warranty.

Freezing is prevented within the device automatically by the freeze-prevention heater.

Freezing cannot be prevented when the power plug is unplugged. Do not remove the power plug from the wall outlet.

Freezing will be prevented regardless of whether the operation switch is ON or OFF.

- * In normal operation, freezing is prevented within the device automatically unless the outside temperature without wind is below 32°F (0°C).
 - The room temperature must be greater than 32°F (0°C) to prevent freezing and the room inside must not have negative pressure.
- * The freeze prevention heaters will not prevent the plumbing external to the unit from freezing. Protect this plumbing with insulation, heat tape or electric heaters, solenoids, or pipe covers. If there remains a freezing risk, contact the nearest Noritz agent.

Take the measures below for extremely cold temperatures*. < Only using the remote controller>

Outside temperature including wind chill factor less than 32°F (0°C).

- The room temperature must be greater than 32°F (0°C) to prevent freezing and the room inside must not have negative pressure.

This method can protect not only the heater, but also the water supply, water piping and mixing valves.

- 1. Turn off the Power On/Off Button.
- 2. Close the gas supply valve.
- Open a hot water fixture, and keep a small stream of hot water running. (0.1 gallon (400cc)/minute or about 0.2" (4mm) thick.)
 * If there is a mixing valve, set it to the highest level.
- 4. The flow may become unstable from time to time.
 - Check the flow 30 minutes later.

* In general, it is not advisable to run water through the unit when it is OFF (page 6), but in this case freeze prevention is more important.



- * Remember to set mixing valves and fixtures to their original levels before using the unit again to prevent scalding.
- * If there is still a risk that the unit will freeze, drain the unit as shown on the next page.

If water will not flow because it is frozen

- 1. Close the gas and water valves.
- 2. Turn off the power button.
- 3. Open the water supply valve from time to time to check whether water is running.
- 4. When the water is flowing again, check for water leaks from the unit and piping before using.

If the heater or the piping is frozen, do not use the heater or it may get damaged.

If the water heater will not be used for a long period of time, drain the water.

Drain the water as follows:



High Temperature

To avoid burns, wait until the unit cools down before draining the water. The appliance will remain hot after it is turned off.

Fixture

Drain water into a bucket to prevent water damage.

- 1. Close the gas valve.
- 2. <Not using the remote controller> Fully open one of the hot water fixtures.

<Using the remote controller> Turn off the power button.




 Not using the remote controller> Turn off the power supply after 2 minutes or more pass from operation of 2.


Do not touch with wet hands.

<Using the remote controller> Turn off the power supply.

Do not touch with wet hands.

- 4. Close the water supply valve.
- 5. Fully open all hot water fixtures.
- 6. 1) Turn the drain plug (1), (2) to the left to open, and then remove.
 - 2) Turn the drain plug (3) to the left to open (Not necessary to remove).
 - 3) Wait approximately 30 seconds.
 - 4) Turn the drain plug (4) to the left to open (Not necessary to remove).





Each drain plug might not be visible if insulation is installed around the piping.

7. Check that the water is completely drained, close all the drain plugs and the hot water fixtures after 10 minutes or more pass from operation of 6.

Preventing Damage from Freezing-2

Turning the Unit Back On

- 1. Check that all drain plugs are inserted.
- 2. Check that all hot water fixtures are closed.
- 3. Follow the procedure on page 10 "Initial operation", steps 1 through 4.
- Make sure that the area around the appliance is well ventilated; open a window or a door if necessary. Then, operate the unit and verify that condensate is coming out of the drain pipe. (During normal use of the water heater, condensate will begin to discharge from the drain pipe within 15 minutes of use. However, depending on the season and/or installation site conditions, it may take longer.)
- * If water does not appear at the end of the drain line, a qualified service technician must clean the condensate line.




After the water heater has been out of use for a long time make sure that you fill the condensate trap with water.

This is to prevent dangerous exhaust gases from entering the building.

Failure to fill the condensate trap could result in severe personal injury or death. (By performing step 4 as described above, the condensate trap will automatically fill itself with water.)

Regular Maintenance-1

Periodic Inspection

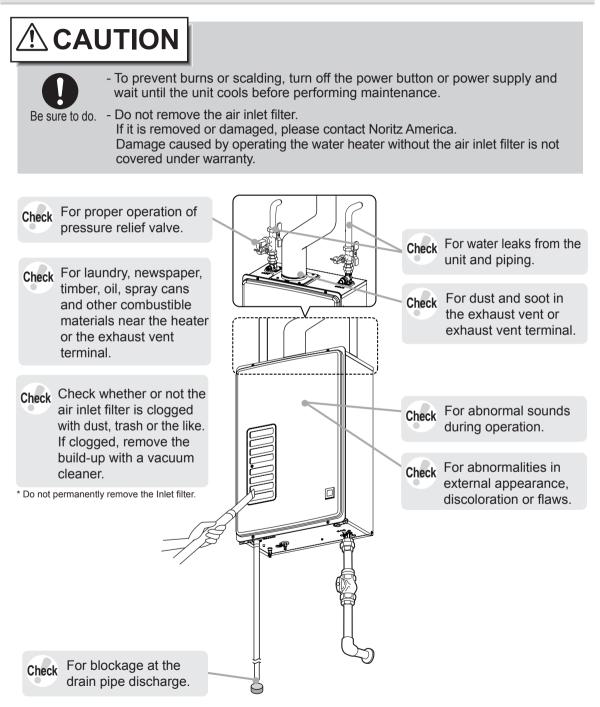

Regular Maintenance-2

Periodic Maintenance

Unit

Wipe the outside surface with a wet cloth, then dry the surface. Use a neutral detergent to clean any stains. If an external condensate neutralizer is installed, periodic replacement of the neutralizing agent will be required. Refer to the instructions supplied with the neutralizer for suggested replacement intervals.

Optional Remote Controller

Wipe the surface with a wet cloth.

- Do not use benzene, oil or fatty detergents to clean the remote controller; deformation may occur.
- · The remote controller is water resistant but not water proof. Keep it as dry as possible.


Water Drain Valve (with Water Filter)

If the water drain valve (with water filter) is covered with debris, the hot water may not run smoothly, or the unit may put out cold water. Check and clean the filter as explained below.

* To avoid burns, wait until the unit cools down before draining the water.

The appliance will remain hot after it is turned off.

- 1. Close the water supply valve.
- 2. Open all hot water fixtures.
- With a bucket ready, remove the drain plug (1) and then turn the drain plug (2) to the left to open (Not necessary to remove).
 Wait approximately 30 seconds.
 After that remove the drain plug (3).
- 4. Take the water drain valve (with water filter) out of the inlet. (See illustration to right).
- 5. Clean the water drain valve (with water filter) with a brush under running water.
- Replace the water drain valve (with water filter) and close the drain plugs. (Take care not to lose the packing.)
- 7. Close all hot water fixtures.
- Open the water supply valve and check that water does not leak from the drain plugs or water drain valve (with water filter).

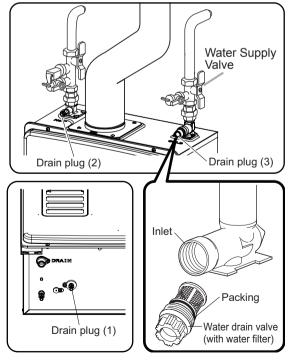

Water Quality and Maintenance

For people who live in a hard water area, periodical flushing is necessary. If the Heat Exchanger is not flushed, the Scale Build-up may cause damage to the Heat Exchanger. In this case, this water heater will detect the Scale Build-up in the Heat Exchanger and then the error code "C * #"* will be displayed in the Display Window.

When the error code "C*#"* is flashing in the Display Window, the Heat Exchanger needs to be flushed to prevent damage from Scale Build-up. Please contact Noritz America for more information about flushing the Heat Exchanger. (http://support.noritz.com/ or 866-766-7489)

= 1, 2, 3, 4, 5, 6, 7, 8, 9, A, b, C, d, E, F


Damage to the water heater as a result of below is not covered by the Noritz America Limited Warranty. To ensure full warranty coverage, treat or condition water that exceeds the target levels provided in this table.

- Hard water
- Poor water quality (See the below list.)
- The water heater has displayed a "C *#" error code indicating Scale Build-up, but the heat exchanger has not been flushed.

Total Hardness**	: 200 mg/L (12 gpg) or less
Aluminum	: 0.05 to 0.2 mg/L or less
Chloride	: 250 mg/L or less
Copper	: 1 mg/L or less
Iron	: 0.3 mg/L or less
Manganese	: 0.05 mg/L or less
рН	: 6.5 - 8.5
Total Dissolved Solids	: 500 mg/L or less
Zinc	: 5 mg/L or less
Sulfate ion	: 250 mg/L or less
Residual chlorine	: 4 mg/L or less

** Maximum limit suggested by Noritz.

Source: EPA National Secondary Drinking Water Regulations (40 CFR Part 143.3)




- * Isolation valves may be purchased as an accessory from an authorized Noritz wholesaler. They allow for full diagnostic testing and easy flushing of the system.
- * The kit includes two full port isolation valves and a pressure relief valve for the hot side. Contact Noritz for more information.

Troubleshooting-1

Check for an Error Code on the Display Window or Optional Remote Controller

If there is a problem with the unit, a numerical error code will flash on the display window or optional remote controller. If this occurs, take appropriate measures as listed below.





When an error code appears, the display and the operation light will flash together.

Display Window

v Optional Remote Controller

Display Window Error Code	Remote Controller Error CodeCauseAction		Action	
	11	Ignition error.	Check whether the gas valve is open. Unplug the unit from power or press the power button on the optional remote controller to turn the unit off, open a hot water fixture, and turn the unit back on. If the flashing number doesn't return, the problem is solved.	
29	29	Clogging of condensate trap or drain pipe.	Check to see if the condensate drain pipe is clogged or frozen. (page 8) Contact the installer or Noritz America Technical Support for assistance.	
90 903 908	90	Abnormal combustion. The air inlet filter may be clogged.	Clean the air inlet filter. (page 21) If the display continues, contact the nearest Noritz agent.	
902		Abnormal combustion, low gas supply pressure.	Have a professional check the gas supply pressure. Contact the nearest Noritz agent.	
94 ; 942	94	Exhaust temperature is too high. *941 Warning indication. - The unit will continue to operate.	Contact the nearest Noritz agent.	
99	99	Abnormal combustion.	Contact the nearest Noritz agent.	
* # *=1-4, F #=1-9, A, b, C, d, E, F	Е, I Е Ч	The unit detects Scale Build-up in the Heat Exchanger. (Warning indication, and then the unit will shut off before long.)	When the error code is flashing in the Display Window, a warning indication will appear in the Display Window. And then the unit may shut off and lock before long. Needs to be flushed the Heat Exchanger to remove the Scale Build-up. If the unit will shut off and locked for this error, the unit can temporarily operate by disconnecting electrical power until the Heat Exchanger can be flushed. Contact Noritz America for more information about flushing the Heat Exchanger. (866-766-7489)	
# =1-9, A, b, C, d, E, F	[F	The unit detects the Scale Build-up in the Heat Exchanger many times (The unit is locked.)	The unit is locked because of repeated Scale Build-up error codes. Must flush the Heat Exchanger to remove the Scale Build-up. Before flushing the Heat Exchanger, contact Noritz America for more information.(866-766-7489)	
		The outlet temperature is colder than set temperature.	Contact the nearest Noritz agent.	
		The indication on the display window shown is not an error of unit. If you try to supply a low flow of water when the inlet water temperature is high, hot water is not supplied sometimes (combustion is automatically stopped and the temperature of outlet water does not become hot).		
	Contact Noritz America if: Any other error code appears. An error code is indicated again after the above actions were followed. There are any other questions.			

Initial Operation

Problems	What to do	Display Window
Unit does not attempt to ignite when water is running.	Check for reversed plumbing.	
	Check the water drain valve filter. (page 22)	
Unit attempts to ignite but	Reset unit and try again. There may be air in the gas line.	1 1
fails.	Have a professional check the gas supply pressure.	1 1
The hot water is not the	The water may be mixed in the hot water plumbing.	1
correct temperature.	The actual outlet water temperature is lower than the set temperature of the unit. Contact the nearest Noritz agent.	

Temperature		
Problems	What to do	Display Window
Hot water is not available	Are the gas and water supply valves fully open?	
when a fixture is opened.	Is the water supply cut off?	ר <u>→</u> – – ק
	(Check for the circular pattern in the Display Window.)	
	Is the hot water fixture sufficiently open?	
	Is the gas being cut off by the gas meter?	1 1
	(Can other gas device such as stoves be used?)	or
	, (For LP) Is there enough gas in the tank?	
	(Can other gas devices such a stoves by used?)	
	Is the water drain valve filter clogged? (page 22)	
	Is the power button (optional remote controller) turned on?	
	Check for the error code in the Display Window. Is the error code "C *#" flashing? (page 24)	[* #
	1 1 1 1 1 1	
No water is available	Is the water supply cut off?	
when a fixture is opened.	(Check for the circular pattern in the Display Window.)	
	Is the unit frozen?	• •
The hot water at the	Is the hot water fixture sufficiently open?	I
fixture is not the correct temperature.	The actual outlet water temperature is lower than the set temperature of the unit. Contact the nearest Noritz agent.	
Water takes time to become hot when turning the hot water fixture.	Have you allowed enough time for the cold water in the pipes to drain out?	

Troubleshooting-2

isplay Window
210_210_210

Amount of Hot Water

Problems	What to do		
The amount of hot water at a certain fixture is not constant.	When hot water is demanded at other fixtures, the amount available may be reduced. The maximum flow available is 4.9 GPM (18.7L/min.) at a 45°F (25°C) temperature rise.		
	Pressure fluctuations and other plumbing conditions can cause the temperature and pressure at a fixture to be unstable, but it should stabilize after a short time.	• 	
	There are some types of hot water taps that discharges large volumes of hot water at first but stabilize after time.	- 	
	To keep the temperature stable, the heater limits the amount of water that can flow through it to a low flow initially, but the amount increases over time.	• 	
[Using the optional remote controller] The amount of hot water in the tub is less/more than the	When hot water is used for other fixtures while filling the bath tub, the tub will not fill as much.	• 	
set amount when using the flow meter alarm feature.	If there is water in the tub already, or when filling is stopped and restarted, the tub will fill more.	· 	
[Using the optional remote controller] The flow meter alarm does not sound even when filled to the set amount.	The flow meter alarm is set to sound when hot water is continuously discharged for the set volume of water. If mixing valves are used, or if cold water is mixed with hot water at the fixture, the tub will fill more than the setting of the flow meter alarm.		
Amount of hot water	Is the water filter clogged? (page 22)	I I	
available has decreased over time.	If the supply water is hard and has not been treated, scale can build-up in the water heater and decrease the maximum amount of hot water available. Scale can be removed from the water heater by flushing the unit periodically. To prevent scale from forming in the water heater, a water softener or scale inhibitor is recommended.		

Troubleshooting-3

Optional Remote Controller Problems What to do **Display Window** The light on the power Has there been a power failure? button does not come on. Is the power connected properly? The water temperature changes : The temperature setting and the flow meter alarm after a power failure or when setting may both need to be reset after a power the power is disconnected. outage. The surface of the remote controller is affixed with a The plastic on the surface protective sheet (to prevent surface scratching, etc.) at time of shipment. This sheet can be removed or left as it or buttons of the remote controller has torn. is. When leaving the protective sheet on, areas frequently peeled, or air bubbles touched may tear or peel. However, the remote controller inside. will not malfunction from water entering such torn or peeled areas. To restore the appearance of the remote controller surface, simply remove the protective sheet.

Sounds		
Problems	What to do	Display Window
The fan can be heard after operation is stopped.	These noises indicate the proper operation of devices which are designed to let the unit reignite more	
A motor can be heard when turning the unit ON or OFF, when opening or closing a fixture, or after the unit has been running for a while.	quickly, and ensure the water temperature is stable.	
The fan can be heard when it is very cold outside.	The fan may run to prevent freezing.	
There is a buzzing, beeping or humming noise emitting from the unit.	This noise is a normal function of the unit. The valves that control the water flow through the unit move during operation and also when the unit is not heating water.	
Loud rumbling noise on start up or during operation emitting from the unit or vent system.	The unit may need adjustments done for installations higher than 2000ft above sea level or for longer vent runs. Please contact your installer or Noritz to verify the unit dip switches are set correctly for your installation.	

Other		
Problems	What to do	Display Window
The Heater stops burning	Are the gas and water supply valves fully open?	-
during operation.	Is the water supply cut off?	1
	Is the hot water fixture sufficiently open?	 -
	Is the gas being cut off by the gas meter? (Can other gas devices such as stoves be used?)	
	(For LP) Is there enough gas in the tank? (Can other gas devices such as stoves be used?)	
White smoke comes out of the exhaust vent on a cold day.	This is normal. The white smoke is actually steam.	
The hot water is turbid.	This is harmless. Small bubbles appear as the air in the water is heated and depressurized rapidly to atmospheric pressure.	
The water appears blue. The bath tub/wash-basin has turned blue.	Coloration to a blue color may be noticed from small traces of copper ion contained in the water and fat (furring). However, there are not problems concerning health. Coloration of the bath tub/wash-basin can be prevented by cleaning frequently.	
Frequent water discharge from the drain pipe.	Condensation forms inside the unit during operation and is discharged from the drain pipe.	

Follow-up Service

Requesting Service

First follow the instructions in the troubleshooting section (page 24 to page 29). If the error is not corrected, contact Noritz America Technical Support at 866-766-7489 or http://support.noritz.com/.

We will need to know: The Model(check the rating plate) *See page 4 for the location of the label Date of purchase(see the warranty) Details of problem(flashing error codes, etc., in much detail as possible) Your name, address, and telephone number Desired date of visit



* A request for service may be rejected if the water heater is installed in a location where working on the unit may be dangerous. Contact a plumber.

Warranty

A warranty registration card is included separately.

Be sure that the installer name, date of purchase and other necessary information are filled in when registering your product.

Read the content carefully, and keep the warranty card in a safe place.

For repairs after the warranty period, there will be a charge on any service, and service will only be performed if the unit is deemed repairable.

Period of Time for Stocking Repair Parts

Noritz will stock repair and maintenance parts for this unit for the time period from the date of the original installation as follows: twelve (12) years for the heat exchanger and ten (10) years for remaining parts.

Reinstallation

If you want to reinstall the appliance at a different location, confirm that the gas and power supply indicated on the rating plate are available at the new location. If you are not sure, consult the local utility company.

Gas Conversion

If you move to a region that uses a different type of gas or if the local gas supply is converted, replacement of the gas manifold and adjustment of the appliance will be necessary.

This work must be performed by either Noritz or a qualified service agency and will be charged for even during the warranty period. The qualified installer will also be responsible for purchasing the gas conversion kit directly from the manufacturer.

For more information, contact Noritz America Technical Support at 866-766-7489.

The gas conversion kit shall be installed by a qualified service agency^{*} in accordance with the manufacturer's instructions and all applicable codes and requirements of the authority having jurisdiction. The information in the instructions must be followed to minimize the risk of fire or explosion or to prevent property damage, personal injury, or death. The qualified service agency is responsible for the proper installation of this kit. The installation is not proper and complete until the operation of the converted appliance is checked as specified in the manufacturer's instructions supplied with the kit.

* A qualified service agency is any individual, firm, corporation, or company which either in person or through a representative is engaged in and is responsible for the connection, utilization, repair or servicing of gas utilization unit or accessories; who is experienced in such work, familiar with all precautions required, and has compiled with all of the requirements of the authority having jurisdiction.

Before the gas conversion is performed, verify the proper gas conversion kit with your water heater model on the table provided below.

Conversion Kit Mod		Conversion Type
CK-65	NRC663-	FSV Propane to Natural Gas
CK-66	NRC663-	FSV Natural Gas to Propane

The following parts are supplied in the conversion kit. These items will replace the existing parts that are currently installed in the unit. Make sure that all parts are replaced and properly installed by a qualified service agency.

* A Noritz remote controller and a digital gas manometer are required to complete the installation. Do not proceed if this equipment is not immediately available.









Manifold Plate O-Ring

Damper

Conversion Kit Label

After the necessary parts have been replaced on the unit, the remote controller is then used to adjust the settings on the water heater for use with the proper gas type.

The gas pressure values at both the gas supply inlet fitting and at the manifold inlet on the unit are verified by the installer. Proper adjustments will be made to ensure safe and efficient operation.

Once this is completed, a final gas leak check will be performed to confirm that all parts have been securely installed.

If you notice the smell of gas at any time after the installation has been completed, turn the water heater off and contact your gas supplier immediately.

Specifications

- Specifications may be changed without prior notice.
 The capacity may differ slightly, depending on the water pressure, water supply, piping conditions, and water temperature.

Specifications

Item		Specification	
Model Name		NRC663-FSV	
Type Installation		Indoor Wall Mounted	
	Air Supply/Exhaust	Power Vented	
Ignition		Direct Ignition	
Operating Pres	sure	15-150 psi	
Minimum Flow	Rate	0.5 GPM (2 L/min.)	
Dimensions (H	eight) x (Width) x (Depth)	27.2" (690mm) x 18.3" (464mm) x 9.4" (240mm)	
Weight		50 lbs.	
Water Holding	Capacity	0.2 Gallon (0.9 L)	
Connection Sizes	Water Inlet	NPT 3/4"	
	Hot Water Outlet	NPT 3/4"	
Gas Inlet		NPT 1/2"	
	Condensate Drain	1/2" Threaded	
Power Supply	Supply	120 VAC (60Hz)	
	Consumption	NG : 83 W LP : 80 W	
		Freeze Prevention 129 W	
Materials	Casing	Zincified Steel Plate/Polyester Coating	
	Flue Collar	Stainless Steel	
	Primary Heat Exchanger	er Copper Sheeting, Copper Tubing	
	Secondary Heat Exchanger		
Safety Devices	ety Devices Flame Rod, Thermal Fuse, Lightning Protection Device (Overheat Prevention Device, Freezing Prevention Dev Fan Rotation Detector		
Accessories		Anchoring Screw	

Performance

Item		Maximum Performance	Minimum Performance
Gas	NG	120,000 btuh	15,000 btuh
Consumption	LP	120,000 btuh	15,000 btuh
Maximum Hot Water Capacity	45°F (25°C) Rise	4.9 GPM (1	8.7 L/min.)
Capacity Range *Depends on the condition		n 0.5-6.6 GPM (2-25.0 L/min.)	
Default Temperature Opt	fault Temperature Options 120°F (50°C), 130°F (55°C), 135°F (5 (Original is 120°F (50°C))		
Temperature Settings (Using the optional	°F Mode:	115-140°F (In 5°F intervals) (6 Options)	
remote controller) °C Mode:		46, 47, 48, 50, 55, 60°C (6 Options)	