



## Model NC199 (GQ-2857WZ US) Series Commercial Water Heater Specification Sheet

Job Name \_\_\_\_\_  
Location \_\_\_\_\_  
Architect/Engineer \_\_\_\_\_  
Wholesaler \_\_\_\_\_  
Contractor \_\_\_\_\_  
Model No. \_\_\_\_\_  
Gas Type \_\_\_\_\_  
No. of Units \_\_\_\_\_ Total BTU/hr Input \_\_\_\_\_  
Flow Rate (GPH) \_\_\_\_\_  
Notes \_\_\_\_\_

- **Standard Input** - gas consumption ranges from 16,000 BTU/h to 199,900 BTU/h
- **Compact Design** - ANSI Z21.10.3/CSA 4.3 certified design that can be wall-mounted indoors with a -DVC model or installed outdoors with an -OD model
- **Durable Steel Casing with Acryl Coating**
- **Heat Exchanger** - manufactured with commercial grade copper, 25% thicker piping than standard models
- **Venting Options** - available in Outdoor (-OD) or Concentric Direct Vent (-DVC) model that requires 5/3 in. Noritz concentric stainless steel pipe.
- **Direct Electronic Ignition**
- **Multi-System Capability** - units can be linked together by using either the optional 2-unit Quick Connect or multi-unit System Controller for up to 6 units.
- **Fully Modulating** - BTU input can range from 16,000 to 1.2 million BTU/h (for 6-unit Multi-System) with stable combustion provided by the industry's 1st Dual-Flame Burner
- **Uniform Efficiency Factor** - 0.82
- **Temperature Controls** - includes remote thermostat that can precisely adjust the output temperature from 100°F to 180°F
- **Safety Devices** - Flame Sensor, Overheat Prevention Device, Lightning Protection Device, Freeze Protection
- **Five Year Limited Heat Exchanger Warranty for Commercial Use**
- **Five Year Limited Parts Warranty & 1-Year Reasonable Labor**
- **Approvals** - CSA, UPC, NSF, Low NOx Approved By SCAQMD [ $<14\text{ng/J}$  or 20ppm]  
This product complies with California AB 1953 Low Lead Law and section 1417(d) of the Safe Drinking Water Act



DVC Model

OD Model

### Model

NC199 \_\_\_\_\_ (-CA)\*

☐ OD (Outdoor Vent)

☐ DVC (Concentric Direct Vent)

\* Canadian (-CA) model also available

### Accessories

☐ Isolator Valves (#IK-WV-200-(SW/TH-LF))

Pipe Cover

☐ for -OD Model (#PC-2S)

☐ for -DVC Model (#PC-5S)


☐ Quick Connect Cord (#QC-2)

6-Unit System Controller

☐ for -OD & DVC (#SC-301-6M-BXT)




## Dimensions

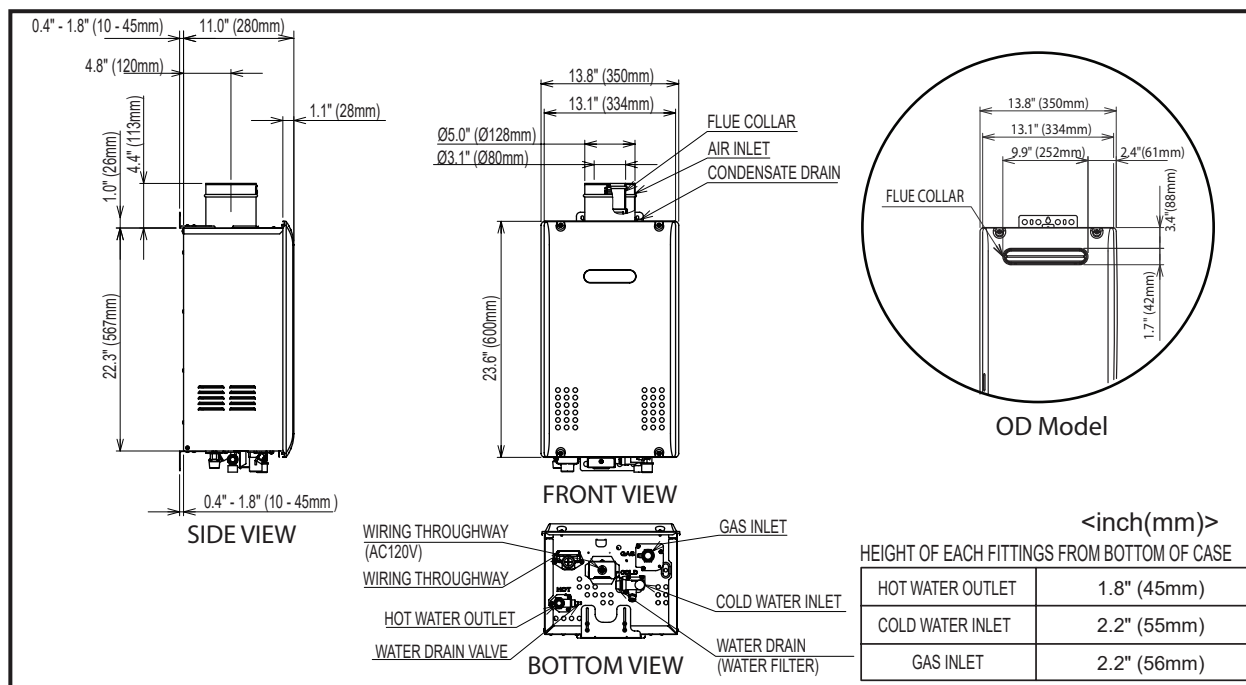

## Flow Rates

Temperature Rise (°F)		70	100
Flow Rate (GPM)	1-unit	4.8	3.4
	2-unit	9.6	6.8
	3-unit	14.4	10.2
	6-unit	28.8	20.4
Flow Rate (GPH)	1-unit	288	204
	2-unit	576	408
	3-unit	864	612
	6-unit	1728	1224

## Pressure Loss

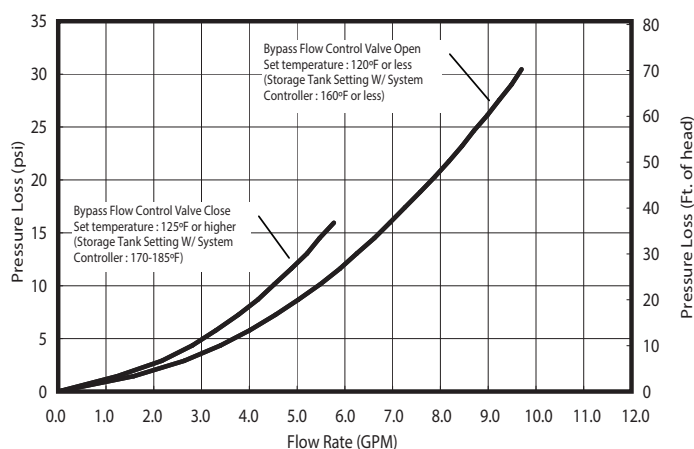

## Power Supply and Consumption

Model Name	Supply	Consumption
NC199OD	120VAC (60 Hz), less than 2 amps	NG: 65W Freeze LP: 67W Prevention: 161W
NC199DVC		NG: 80W Freeze LP: 83W Prevention: 193W

## Temperature Settings and Options

Temperature Settings	100-150°F (In 5°F intervals), 160, 170, 185 °F (14 Options)
Default Temperature Options	120, 130, 140, 185 °F (Default is 120°F)

## Specification

Commercial, gas-fired, wall-mounted water heater(s) shall be outdoor/concentric direct vent Model NC199 Series as manufactured by Noritz America Corporation. The water heater(s) shall have a 5-year limited Heat Exchanger warranty and a 5-year limited Parts warranty per Noritz Limited Warranty. Unit(s) shall be designed to burn natural/propane gas and certified by CSA International to the latest edition of ANSI standard Z21.10.3/CSA 4.3. Water heater(s) shall have a nominal flow rate capacity of \_\_\_\_\_ GPH @ 100°F rise with rated input of \_\_\_\_\_ BTU/hr. Water heater(s) shall be vented with 3"/5" Noritz concentric stainless steel pipe (-DVC model only) at a distance not to exceed 29' (or equivalent) with 3 elbows terminating vertically or horizontally. Water heater(s) is rated for 150 PSI working water pressure and 300 PSI test pressure. Gas supply pressure shall be 4.0" to 10.5" WC for natural gas and 8.0" to 14.0" WC for propane. Unit(s) shall have a coated steel case, copper heat exchanger, stainless steel dual-flame burner, aluminum gas control valves, 3/4" inlet gas connection, 3/4" brass inlet/outlet water connections, and water holding capacity of 0.2 gallons. The outdoor (-OD) model weighs 54 lbs. and the concentric direct vent (-DVC) model weighs 58 lbs. Unit(s) shall include features such as an adjustment for high elevation installations, temperature lockout, and 14 temperature options from 100-150°F in 5°F intervals and 160-185°F in 10-15°F intervals. The heater(s) shall be controlled by an internal circuit board that monitors the inlet and outlet temperatures with installed thermistors, sensing and controlling flow rate to set point temperature with air-fuel ratio controls in order to maintain thermal combustion efficiency. Unit(s) shall include safety features such as flame sensor system, thermal cut-off fuses, lightning protection device, overheat prevention device, freeze protection device, and fan rotator detector. Multi-system applications that require 2 units shall be installed by connecting the units using a single cable-only connection (Quick-Connect). Applications that require 3 to 6 units shall use a multi-unit central controller (System Controller). The water heater(s) exceeds the energy efficiency requirements of ASHRAE 90.1b-1992 and listed by SCAQMD rule (<14ng/J or 20ppm).

**Noritz America reserves the right to discontinue, or change at any time, the designs and/or specifications of its products without notice.**